

TRACE

AMBIENT LIGHT LUMINAIRE

STL22460BR/30



12,5W

Power

650lm

Luminous flux

80°


Beam angle

TECHNICAL SPECIFICATIONS TABLE

Beam angle	80°
Luminous efficacy	52lm/W
Power factor	0,4
Luminous flux	650lm
Frequency	50/60Hz
CRI (Color rendering index)	>93(R9 >60)
Power	12,5W
Correlated color temperature (CCT)	3000K
Voltage (Vac)	100-240Vac
Lifespan (L70)	25000h


Technical Drawing

STL22460

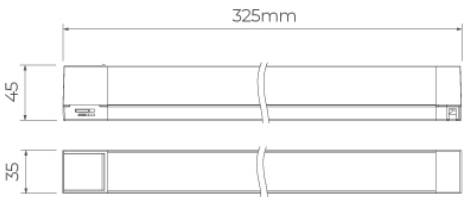


Graphics

STL22460BR



STL22460BR



OTHER INFORMATION

Finishing	White
Color temperature	Warm white
Dimmable	No
Warranty	2 years
Patent information	Patented product
Prevailing material	Aluminum

DOWNLOADS

↓ IES FILE - STL22460BR/30

↓ MANUAL Trace

↓ SKETCHUP - STELLA - STL22460BR-30-40 - STL22460PTO-30-40 - TRACE_PACK.zip

↓ REVIT - STL22460BR_30_40_STL22460PTO_30_40.rfa

