

TRACE

AMBIENT LIGHT LUMINAIRE

STL22460BR/40



12,5W

Power

700lm

Luminous flux

80°


Beam angle

TECHNICAL SPECIFICATIONS TABLE

Beam angle	80°
Luminous efficacy	56lm/W
Power factor	0,4
Luminous flux	700lm
Frequency	50/60Hz
CRI (Color rendering index)	>93(R9 >60)
Power	12,5W
Correlated color temperature (CCT)	4000K
Voltage (Vac)	100-240Vac
Lifespan (L70)	25000h

Technical Drawing

STL22460

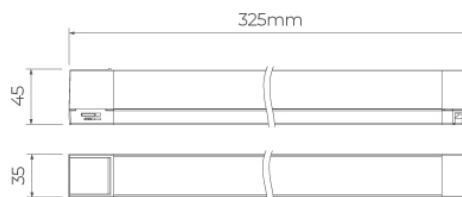


Graphics

STL22460BR

1m	327lx	1,8m
2m	82lx	3,5m
3m	36lx	5,3m
4m	20lx	7m
5m	13lx	8,8m

h, Emax, ø

STL22460BR



OTHER INFORMATION

Finishing	White
Color temperature	Neutral white
Dimmable	No
Warranty	2 years
Patent information	Patented product
Prevailing material	Aluminum

DOWNLOADS

[↓ IES FILE - STL22460BR/40](#)[↓ MANUAL Trace](#)[↓ SKETCHUP - STELLA - STL22460BR-30-40 - STL22460PTO-30-40 - TRACE_PACK.zip](#)[↓ REVIT - STL22460BR_30_40_STL22460PTO_30_40.rfa](#)