

TRACE

AMBIENT LIGHT LUMINAIRE

STL22460PTO/40



12,5W

Power

500lm

Luminous flux


80°

Beam angle




Technical Drawing

STL22460

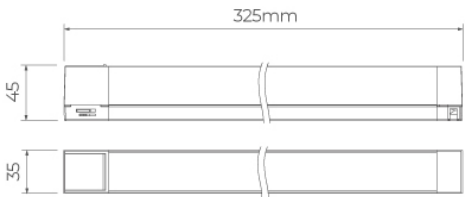

Graphics



TECHNICAL SPECIFICATIONS TABLE

Beam angle	80°
Luminous efficacy	40lm/W
Power factor	0,4
Luminous flux	500lm
Frequency	50/60Hz
CRI (Color rendering index)	>93(R9 >60)
Power	12,5W
Correlated color temperature (CCT)	4000K
Voltage (Vac)	100-240Vac
Lifespan (L70)	25000h

OTHER INFORMATION

Finishing	Black
Color temperature	Neutral white
Dimmable	No
Warranty	2 years
Patent information	Patented product
Prevailing material	Aluminum

DOWNLOADS

↓ IES FILE - STL22460PTO/40

↓ MANUAL Trace

↓ SKETCHUP - STL22460BR_30_40_STL22460PTO_30_40.skp

↓ REVIT - STL22460BR_30_40_STL22460PTO_30_40.rfa

