

TRACE

AMBIENT LIGHT LUMINAIRE

STL22461BR/30



25W

Power

1400lm

Luminous flux

80°


Beam angle

TECHNICAL SPECIFICATIONS TABLE

Beam angle	80°
Luminous efficacy	56lm/W
Power factor	0,4
Luminous flux	1400lm
Frequency	50/60Hz
CRI (Color rendering index)	>93(R9 >60)
Power	25W
Correlated color temperature (CCT)	3000K
Voltage (Vac)	100-240Vac
Lifespan (L70)	25000h


Technical Drawing

STL22461

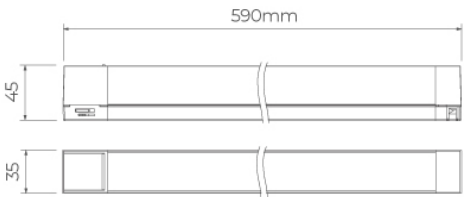


Graphics

STL22461BR



STL22461BR



OTHER INFORMATION

Finishing	White
Color temperature	Warm white
Dimmable	No
Warranty	2 years
Patent information	Patented product
Prevailing material	Aluminum

DOWNLOADS

↓ IES FILE - STL22461BR/30

↓ MANUAL Trace

↓ SKETCHUP - STL22461BR_30_40_STL22461PTO_30_40.skp

↓ REVIT - STL22461BR_30_40_STL22461PTO_30_40.rfa

