

TRACE

AMBIENT LIGHT LUMINAIRE

STL22461BR/40



25W

Power

1450lm

Luminous flux

80°


Beam angle

TECHNICAL SPECIFICATIONS TABLE

Beam angle	80°
Luminous efficacy	58lm/W
Power factor	0,4
Luminous flux	1450lm
Frequency	50/60Hz
CRI (Color rendering index)	>93(R9 >60)
Power	25W
Correlated color temperature (CCT)	4000K
Voltage (Vac)	100-240Vac
Lifespan (L70)	25000h

Technical Drawing

STL22461

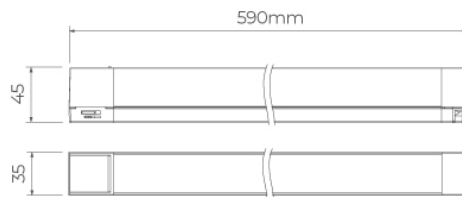

OTHER INFORMATION

Finishing	White
Color temperature	Neutral white
Dimmable	No
Warranty	2 years
Patent information	Patented product
Prevailing material	Aluminum


Graphics

STL22461BR

1m	649lx	1,8m
2m	162lx	3,7m
3m	72lx	5,5m
4m	41lx	7,3m
5m	26lx	9,2m

h, Emax, Ø

STL22461BR



DOWNLOADS

[↓ IES FILE - STL22461BR/40](#)
[↓ MANUAL Trace](#)
[↓ SKETCHUP - STELLA - STL22461BR-30-40 - STL22461PTO-30-40 - TRACE_PACK.zip](#)
[↓ REVIT - STL22461BR_30_40_STL22461PTO_30_40.rfa](#)
