

TRACE

AMBIENT LIGHT LUMINAIRE

STL22461PTO/30



25W

Power

900lm

Luminous flux

80°


Beam angle

TECHNICAL SPECIFICATIONS TABLE

Beam angle	80°
Luminous efficacy	36lm/W
Power factor	0,4
Luminous flux	900lm
Frequency	50/60Hz
CRI (Color rendering index)	>93(R9 >60)
Power	25W
Correlated color temperature (CCT)	3000K
Voltage (Vac)	100-240Vac
Lifespan (L70)	25000h

Technical Drawing

STL22461

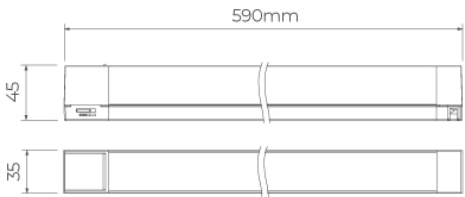


Graphics

STL22461PTO

1m	472lx	1,7m
2m	118lx	3,4m
3m	52lx	5,1m
4m	30lx	6,8m
5m	19lx	8,5m

h, Emax, ø

STL22461PTO



OTHER INFORMATION

Finishing	Matte black
Color temperature	Warm white
Dimmable	No
Warranty	2 years
Patent information	Patented product
Prevailing material	Aluminum

DOWNLOADS

↓ IES FILE - STL22461PTO/30

↓ MANUAL Trace

↓ SKETCHUP - STL22461BR_30_40_STL22461PTO_30_40.skp

↓ REVIT - STL22461BR_30_40_STL22461PTO_30_40.rfa

