

TRACE

ANGULAR LIGHT LUMINAIRE ASYMMETRIC
LIGHT BEAM

STL22470PTO/30



12,5W

Power

640lm

Luminous flux

Asymmetrical
80°

Beam angle




TECHNICAL SPECIFICATIONS TABLE

Beam angle	Asymmetrical 80°
Luminous efficacy	51lm/W
Power factor	0,4
Luminous flux	640lm
Frequency	50/60Hz
CRI (Color rendering index)	>93(R9 >60)
Power	12,5W
Correlated color temperature (CCT)	3000K
Voltage (Vac)	100-240Vac
Lifespan (L70)	25000h

Technical Drawing


STL22470

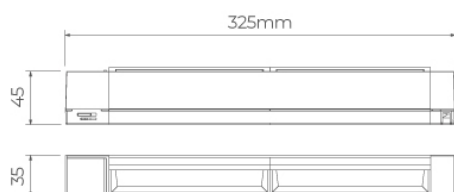

OTHER INFORMATION

Finishing	Black
Color temperature	Warm white
Dimmable	No
Warranty	2 years
Patent information	Patented product
Prevailing material	Aluminum

Graphics



DOWNLOADS

[↓ IES FILE - STL22470PTO/30](#)
[↓ MANUAL Trace](#)
[↓ SKETCHUP - STELLA - STL22470BR-30 - STL22470PTO-30 - TRACE_PACK.zip](#)
[↓ REVIT - STL22470BR_30_STL22470PTO_30.rfa](#)
