



NEW PRODUCTS

2026

STELLA

2026

MORE THAN 350 NEW PRODUCTS TO LIGHT UP A SPECIAL YEAR.

At Stella, each product comes from a thorough understanding of light - its form, application and how it affects people and environments. This attention to detail brings inspiration to every page of this new products' catalogue, filled with a series of launches in Outdoor Lighting, Lighting Fixtures, Systems, LED Strips and Drivers, including new S.TOUCH dimmers and accessories.

LIGHTING FIXTURES



WAVE
P.6



MOBILI
P.10



ROUND
P.22



SQUARE MICRO
P.26

SYSTEMS



S.LINE
P.30



TRACE MICRO
P.40



STAGE
P.46

24V OUTDOOR LIGHTING



ORGANIK 24V
P.50



VERTIK
P.56



S.GROUND 24V PRO
P.58




WAY 24V
P.62

100-240V OUTDOOR LIGHTING




EVO FLOODLIGHT
P.64


LED STRIPS



NEON LED STRIPS
P.66



ALL LIGHT LED STRIPS
P.72



THERMO LED STRIPS
P.73

LED DRIVERS



PRO LED DRIVERS
P.76

S.TOUCH



S.TOUCH
P.78

WAVE

A DIVE INTO THE ELEGANCE OF CURVES.

Wave is Stella's new profile series, defined by continuous curved lines and exclusive lenses, with three different models:

- **Semi-recess mounted profile:**
slightly recessed lens, 100% illuminated surface including the sides;
- **Recess mounted profile:**
ultra-recessed "Invisible" lens that hides the light source for enhanced visual comfort;
- **Surface mounted profile:**
fluid design with a gently curved lens and an optional pendant application.





WAVE
RECESS, SEMI-RECESS AND SURFACE MOUNTED PROFILE

RECESS MOUNTED PROFILE - INVISIBLE LENS



30mm
White
1m - STL25529
2m - STL25539



50mm
White
1m - STL25543
2m - STL25544



Check out the indicated
LED Strips

SEMI-RECESS MOUNTED PROFILE



30mm
White
1m - STL25517
2m - STL25518



Check out the indicated
LED Strips

SURFACE MOUNTED PROFILE



22mm
White
1m - STL25504BR
2m - STL25506BR



22mm
Black
1m - STL25504PTO
2m - STL25506PTO



Check out the indicated
LED Strips

SUSPENSION KIT



2x 2m
White - STL25474BR
Black - STL25474PTO

* LED Strips are sold separately.

Learn more



MOBILI

A COMPLETE SOLUTION FOR YOUR FURNITURE.



MORE THAN 40 PRODUCTS AND ENDLESS POSSIBILITIES

Mobili is Stella's new series, created to enrich your furniture's every detail. A complete solution to integrate, highlight and broaden furniture lighting's possibilities, with compact recess mounted lighting fixtures, adjustable LED spotlights, recess and surface mounted profiles, LED strips, sensors, dimmers and several accessories.



MOBILI MICRO
LED DOWNLIGHT | 12V

An accent downlight that can be installed in several kinds of furniture, with a minimal size that makes it possible to highlight even the tiniest of spaces.



MOBILI MICRO LED RECESSED DOWNLIGHT | 12V

With the same compact body as the Mobili Micro - LED Downlight version, but with a further recess for the light source that provides greater visual comfort while highlighting the furniture's elements.



Ø19mm



MOBILI MICRO | ADJUSTABLE LED SPOTLIGHT | 12V

A micro spotlight that makes it possible to illuminate in different directions. The Mobili Micro Spotlights can also be used as a set, to highlight larger objects.



Ø15mm



MOBILI
WASHER
26.5x7.8mm

MOBILI
SUPERMICRO
6.8x9.1mm

MOBILI
NARROW ANGLE
11.6x10.1mm

MOBILI
WIDE
12x10mm

MOBILI
SHELF
15.7x17.5mm

SPECIAL PROFILES.


With different models and angle options, Mobli profiles were specially developed by Stella to answer to a project's various needs. From standout options to the more discreet models, like Mobli Shelf - ideal for cabinets - Stella's new series introduces four recess mounted and one surface mounted version to inspire furniture lighting.




MOBILI WASHER
SURFACE MOUNTED PROFILE



MOBILI
SUPERMICRO
RECESS MOUNTED PROFILE

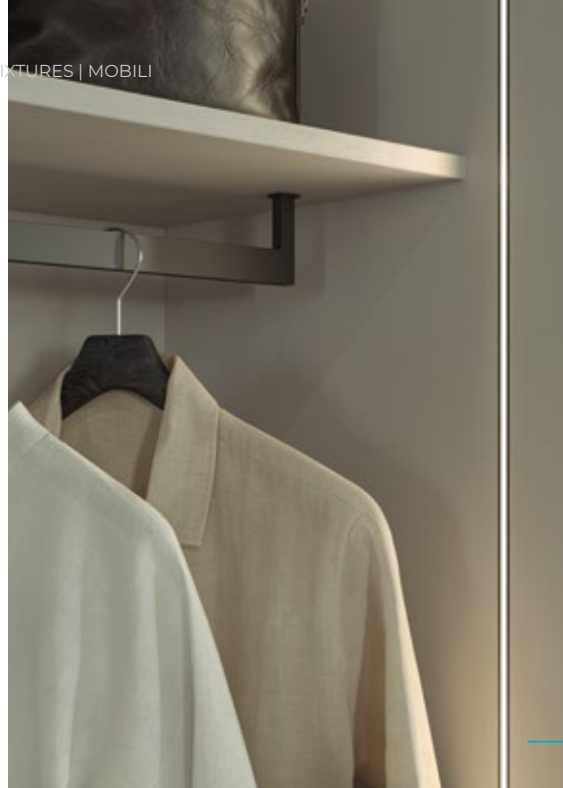

MOBILI WIDE
RECESS MOUNTED PROFILE

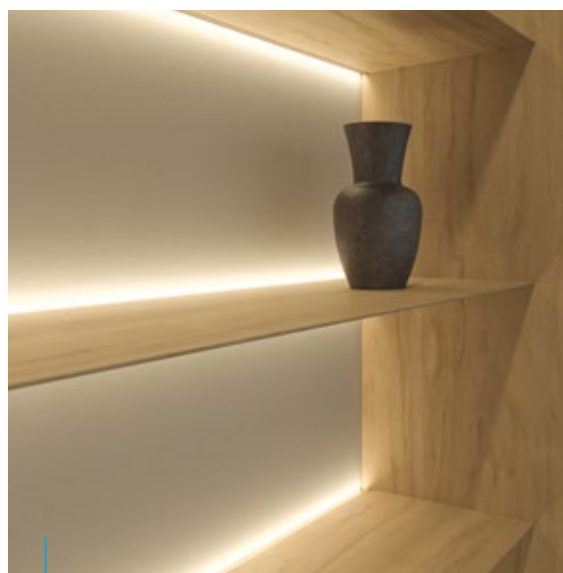

MOBILI SHELF
RECESS MOUNTED PROFILE | TWO SIDES




MOBILI NARROW ANGLE
RECESS MOUNTED PROFILE

COLORS AND COMPOSITIONS.

The Mobili series' special profiles are available in two finishing options. The Fendi color version goes well with white furniture, with light to medium wood hues, with warm rust tones like gold, bronze and old gold. The Dark Gray option enhances furniture of darker shades and highlights the lighting fixtures in contrast with the furniture's color.



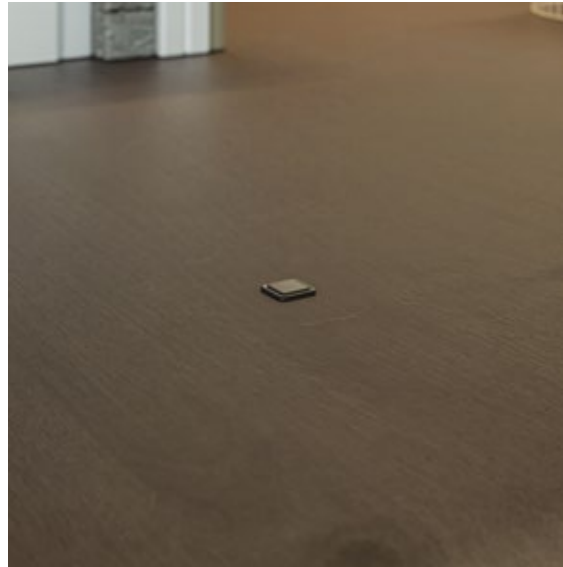

MOBILI DIMMERS AND SENSORS

Among many accessories, the Mobili series offers sensors so that light is automatically activated when a cabinet door is opened and a version for dimming control by touch, on the furniture.



MOBILI GHOST

Ideal for hidden applications on cabinets, shelves and wine racks, Mobili Ghost makes it possible to activate, turn off and control lighting intensity by touching the furniture surface.



MOBILI
DOWNLIGHTS AND PROFILES



MOBILI MICRO
LED DOWNLIGHT | 12V



1W • 45lm • 20°
2700K • 3000K • CRI 90
Ø17.5x15mm
White • Black

STL25338BR/27
STL25338PTO/27
STL25338BR/30
STL25338PTO/30

MOBILI MICRO
LED RECESSED DOWNLIGHT | 12V



1W • 44lm • 20°
2700K • 3000K • CRI 90
Ø19x28mm
White • Black

STL25337BR/27
STL25337PTO/27
STL25337BR/30
STL25337PTO/30


MOBILI MICRO | ADJUSTABLE
LED SPOTLIGHT | 12V



1,5W • 120lm • 30°
2700K • 3000K • CRI 92
Ø15x49mm
White • Black

STL25901BR/27
STL25901PTO/27
STL25901BR/30
STL25901PTO/30

MOBILI NARROW ANGLE
ANGULAR RECESS MOUNTED PROFILE
NARROW DIFFUSER




1m
Dark Gray • Fendi

STL25359GR
STL25359FD




MOBILI SUPERMICRO
RECESS MOUNTED PROFILE
NARROW DIFFUSER



1m
Dark Gray • Fendi
STL25357GR
STL25357FD



MOBILI WIDE
RECESS MOUNTED PROFILE
WIDE DIFFUSER



1m
Dark Gray • Fendi

STL25354GR
STL25354FD



MOBILI SHELF
RECESS MOUNTED PROFILE | TWO SIDES
NARROW DIFFUSER



1m
Dark Gray • Fendi

STL25350GR
STL25350FD



MOBILI WASHER
SURFACE MOUNTED PROFILE
NARROW DIFFUSER



1m
Dark Gray • Fendi

STL25348GR
STL25348FD



ALL LIGHT 12V EVO LED STRIP
SUPERMICRO | 2.8mm



5W/m • 300lm/m
2700K • 3000K
CRI 90

STL25801/27
STL25801/30

ALL LIGHT 12V EVO LED STRIP
MICRO | 5mm



6W/m • 450lm/m
3000K
CRI 90

STL25939/30

MOBILI
DIMMERS, SENSORS, DRIVERS AND ACCESSORIES

MOBILI SINGLE SENSOR
CABINET DOOR SENSOR



Master Control
14x31x15.4mm
White

STL25317

MOBILI DUAL SENSOR
CABINET DOOR SENSOR



Master Control
14x31x15.4mm
White

STL25318

MOBILI TOUCH
DIMMER



Master Control
14x14x15mm
Black • White

STL25316BR
STL25316PTO

MOBILI GHOST
HIDDEN DIMMER



Master Control
40x55x8mm
White

STL25319

MOBILI SINGLE SENSOR
CABINET DOOR SENSOR



Channel Control
14x31x15.4mm
White

STL25324

MOBILI DUAL SENSOR
CABINET DOOR SENSOR



Channel Control
14x31x15.4mm
White

STL25325

MOBILI TOUCH
DIMMER



Channel Control
14x14x15mm
Black • White

STL25320BR
STL25320PTO

MOBILI GHOST
HIDDEN DIMMER



Channel Control
40x55x8mm
White

STL25326

MOBILI 12V DRIVER
5 CHANNELS



36W
12V • 100-240V
5 channels
57x18.5x148mm

STL25329

MOBILI 12V DRIVER
7 CHANNELS



60W
12V • 100-240V
7 channels
57x18.5x203mm

STL25341

CHARGING CONNECTOR



White
STL25342

CHANNEL ACTIVATING
EXTENSION



White
STL25343

GENERAL ACTIVATING
EXTENSION



Black
STL25344

[Learn more](#)





ROUND

THE PERFECT CIRCLE OF COMFORT AND DESIGN.



Stella's new generation of round LED downlights combines an elegant design with the visual comfort of a recessed light source. Among them, ambient light models with CRI90 in adjustable and office versions, besides narrow beam options. This series was thought-out to provide a seamless and sophisticated architectural integration, enhancing each space with balance and personality.



1. Round Narrow - White · 2. Round Narrow - Black
 3.Round | Adjustable - White and Dark Chrome
 4. Round | Adjustable - Black and Dark Chrome · 5. Round | Adjustable - White
 6. Round Office - 20W White · 7. Round Office - 30W White

ROUND

LED RECESSED DOWNLIGHTS

ROUND | ADJUSTABLE
 LED RECESSED DOWNLIGHT

	7W · 360lm · 15° 2700K · 3000K · CRI 90 Ø59x79mm White Black and Dark Chrome White and Dark Chrome	STL25389BR/27 STL25389BRPTO-CR/27 STL25389PTO-CR/27 STL25389BR/30 STL25389BRPTO-CR/30 STL25389PTO-CR/30
	7W · 500lm · 36° 2700K · 3000K · CRI 90 Ø59x79mm White Black and Dark Chrome White and Dark Chrome	STL25398BR/27 STL25399BRPTO-CR/27 STL25399PTO-CR/27 STL25398BR/30 STL25399BRPTO-CR/30 STL25399PTO-CR/30
	9W · 650lm · 36° 2700K · 3000K · CRI 90 Ø79x85mm White Black and Dark Chrome White and Dark Chrome	STL25396BR/27 STL25397BRPTO-CR/27 STL25397PTO-CR/27 STL25396BR/30 STL25397BRPTO-CR/30 STL25397PTO-CR/30
	12W · 1000lm · 36° 2700K · 3000K · CRI 90 Ø99x123mm White Black and Dark Chrome White and Dark Chrome	STL25394BR/27 STL25395BRPTO-CR/27 STL25395PTO-CR/27 STL25394BR/30 STL25395BRPTO-CR/30 STL25395PTO-CR/30

ROUND NARROW

LED RECESSED DOWNLIGHT

	7W · 140lm · 20° 2700K · 3000K · CRI 97 Ø60x43.6mm White · Black	STL25339BR/27 STL25339PTO/27 STL25339BR/30 STL25339PTO/30
--	--	--

ROUND OFFICE

LED RECESSED DOWNLIGHT

	20W · 1800lm · 60° 3000K · 4000K · CRI 90 Ø135x79.3mm White	STL25390BR/30 STL25390BR/40
	30W · 2700lm · 60° 3000K · 4000K · CRI 90 Ø186x100.5mm White	STL25340BR/30 STL25340BR/40



Learn more





SQUARE MICRO

MINIMALISM WITH AN EXTRA
LAYER OF COMFORT.



The Square Micro series debuts with small dimensions to expand the options for lighting spaces. A minimalist design catches the eye, while a low UGR (13 to 15) ensures visual comfort for fixed and adjustable models with an integrated recessed light source, in recess mounted (1, 3 or 5 beams) and surface mounted (3 or 5 beams) versions.



SQUARE MICRO



ADJUSTABLE LED RECESSED DOWNLIGHTS

	3W • 110lm • 15° 2700K • 3000K • CRI 90 57x57mm White Black and Black Piano	STL25362BR/27 STL25362PTO-BP/27 STL25362BR/30 STL25362PTO-BP/30		3W • 105lm • 30° 2700K • 3000K • CRI 90 57x57mm White Black and Black Piano	STL25363BR/27 STL25363PTO-BP/27 STL25363BR/30 STL25363PTO-BP/30
	7W • 340lm • 30° 2700K • 3000K • CRI 90 57x104mm White Black and Black Piano	STL25364BR/27 STL25364PTO-BP/27 STL25364BR/30 STL25364PTO-BP/30		11,5W • 580lm • 30° 2700K • 3000K • CRI 90 57x159mm White Black and Black Piano	STL25365BR/27 STL25365PTO-BP/27 STL25365BR/30 STL25365PTO-BP/30

LED RECESSED DOWNLIGHTS

	3W • 110lm • 15° 2700K • 3000K • CRI 90 44x44mm White Black and Black Piano	STL25366BR/27 STL25366PTO-BP/27 STL25366BR/30 STL25366PTO-BP/30		3W • 105lm • 30° 2700K • 3000K • CRI 90 44x44mm White Black and Black Piano	STL25367BR/27 STL25367PTO-BP/27 STL25367BR/30 STL25367PTO-BP/30
	7W • 340lm • 30° 2700K • 3000K • CRI 90 46x94mm White Black and Black Piano	STL25368BR/27 STL25368PTO-BP/27 STL25368BR/30 STL25368PTO-BP/30		11,5W • 580lm • 30° 2700K • 3000K • CRI 90 46x147mm White Black and Black Piano	STL25369BR/27 STL25369PTO-BP/27 STL25369BR/30 STL25369PTO-BP/30

LED RECESSED SURFACE MOUNTED DOWNLIGHTS

	7W • 340lm • 30° 2700K • 3000K • CRI 90 35x84x70mm Black and Black Piano	STL25301PTO-BP/27 STL25301PTO-BP/30		11W • 530lm • 30° 2700K • 3000K • CRI 90 35x136x70mm Black and Black Piano	STL25302PTO-BP/27 STL25302PTO-BP/30
---	--	--	---	--	--



Learn more





S.LINE

THE EVOLUTION LINE OF SYSTEMS.



S.LINE.
STELLA'S NEW TWO DIMMABLE
CIRCUITS SYSTEM



Evolution follows its natural course at Stella with S.LINE. A new system, with compact design and new features, that can combine 24mm-width recessed and surface tracks to different luminaires.



S11 • S16 • S20

NEW OPTICS FOR PERFORMANCE.

A new generation of signature optical assemblies was thoroughly developed at our Technological Center to avail the most of LED technology and reproduce the ideal light beam for each application. The precision of engineering meets design's sensibility, enhancing our brand's essence in a new designation, that matches Stella's "S" to the lighting market's nomenclature standards.





A NAME THAT KEEPS UP WITH TECHNOLOGY'S EVOLUTION.
How LED S.LINE models compare to LED lamps:

S11 → MR11
S16 → MR16
S20 → PAR20



INVERT SIDE.
2 CIRCUITS, QUICKLY
SWITCHED.

S.LINE offers the exclusive Invert Side feature, with two independently dimmable circuits that allows for different sets of luminaires to be turned on separately. To switch circuits, just flip the fixture's base on the track.

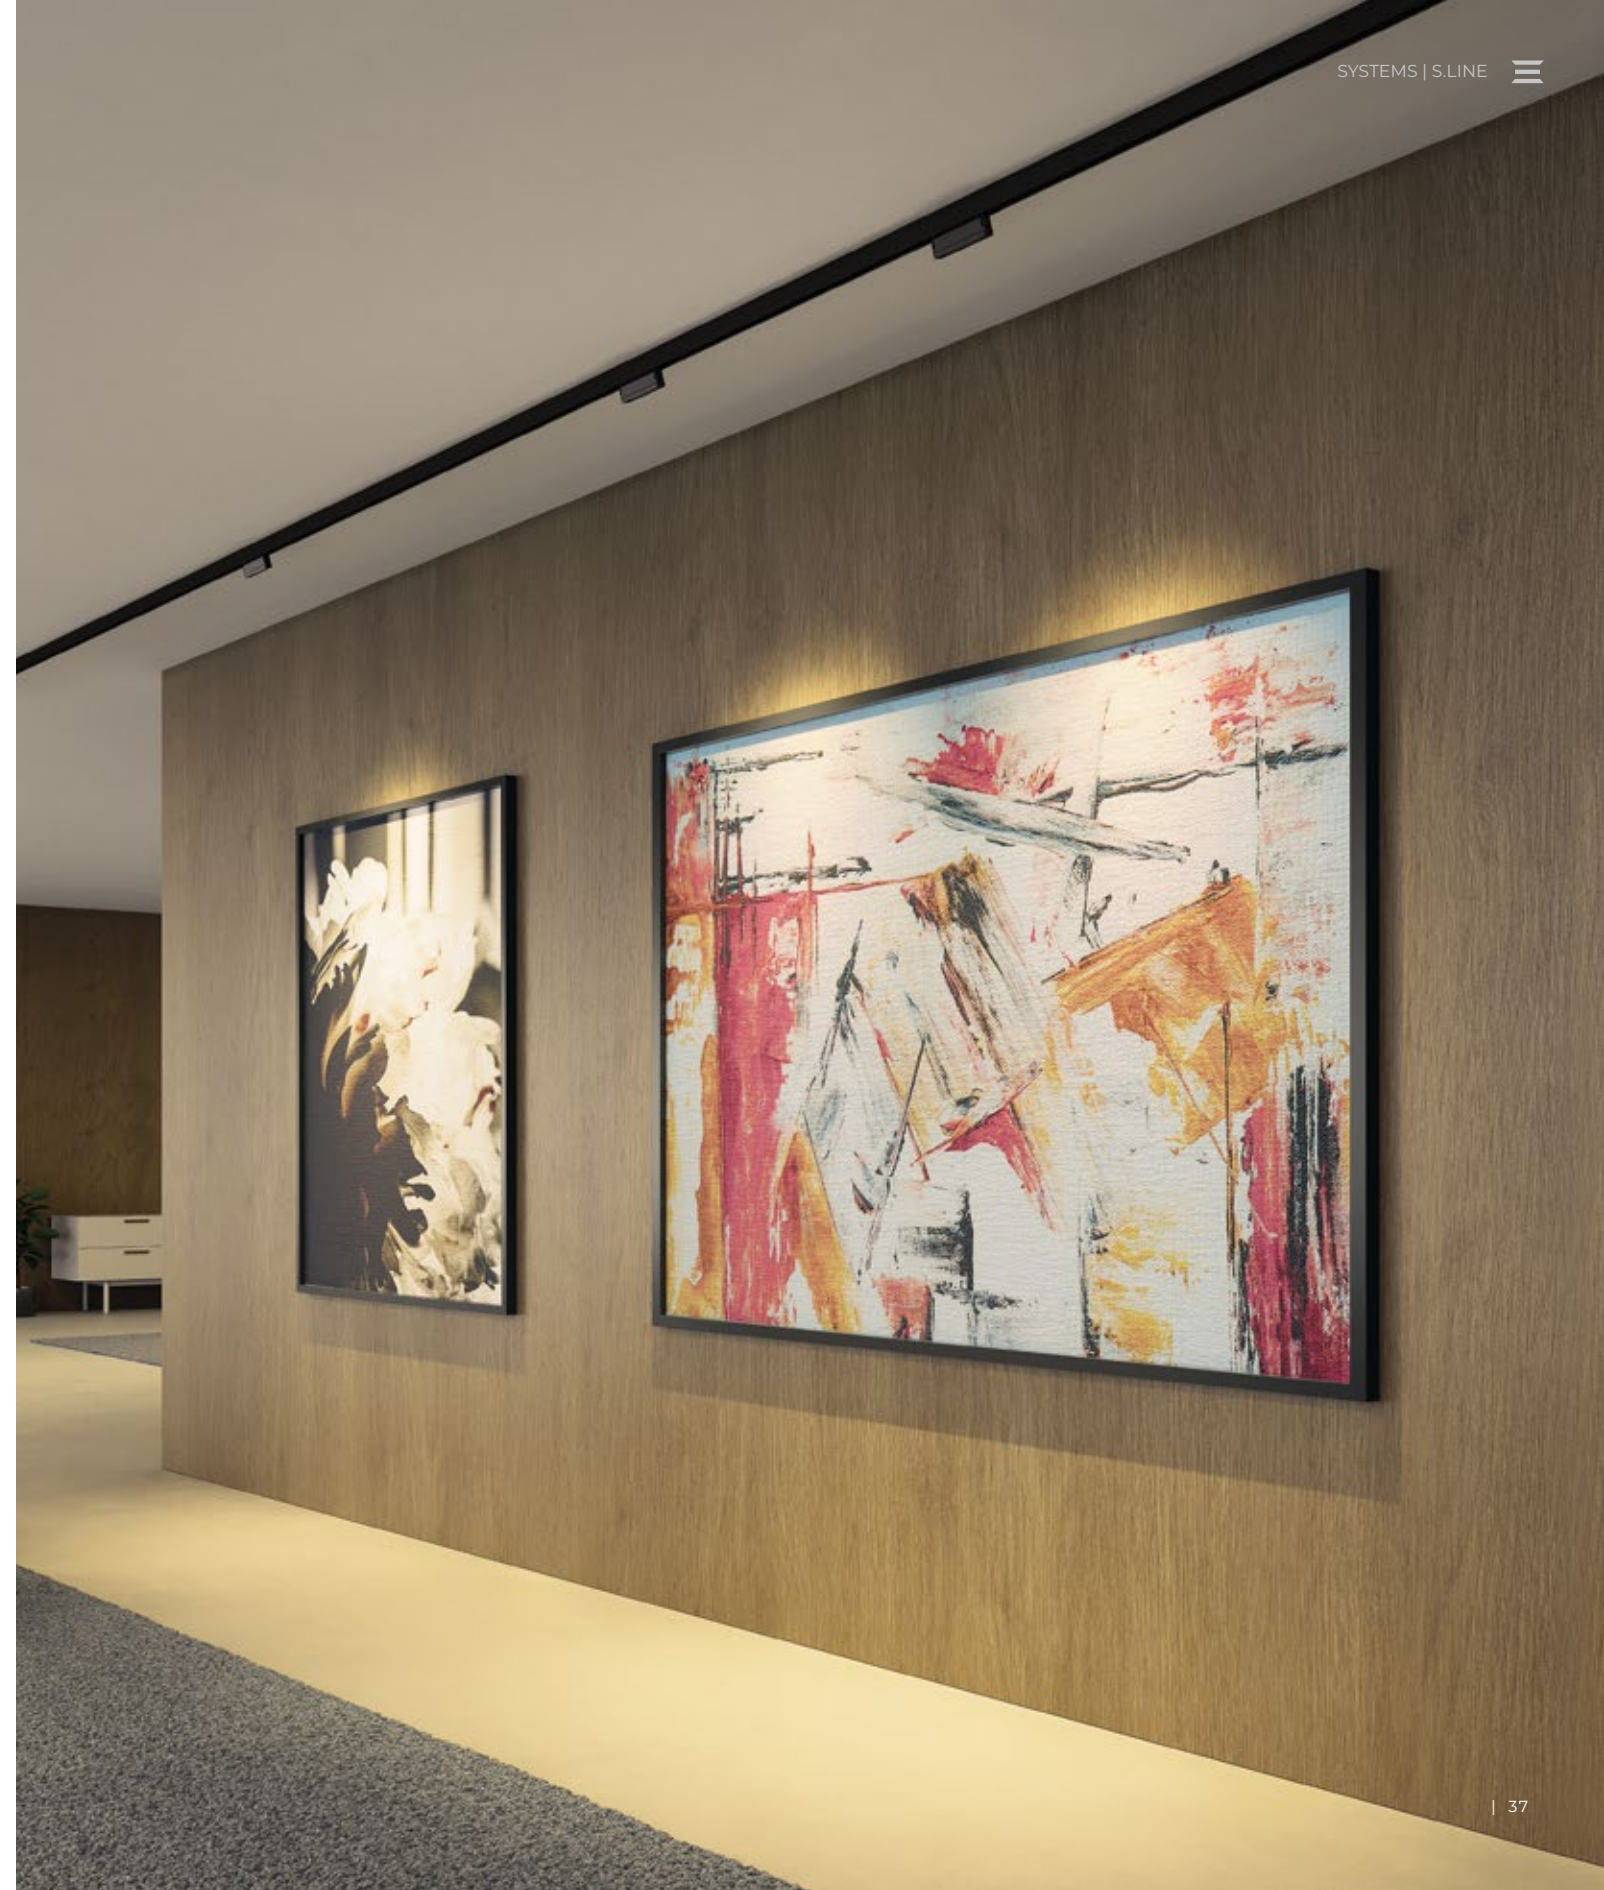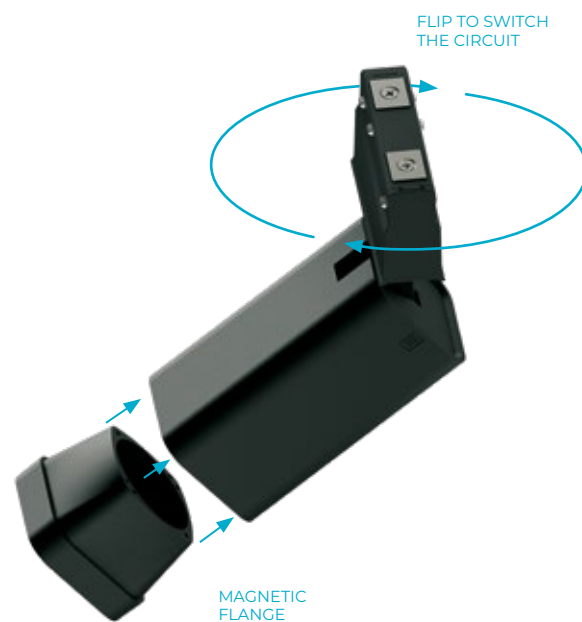

S.LINE
24V DIMMABLE 0-10V SYSTEM



S.LINE LED
SPOTLIGHT S11



4W • 260lm • 25°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24438BR/27
STL24438PTO/27
STL24438BR/30
STL24438PTO/30

S.LINE LED
SPOTLIGHT S16



8W • 540lm • 30°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24440BR/27
STL24440PTO/27
STL24440BR/30
STL24440PTO/30

S.LINE LED
SPOTLIGHT S11



4W • 260lm • 25°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24492BR/27
STL24492PTO/27
STL24492BR/30
STL24492PTO/30

S.LINE LED
SPOTLIGHT S16



8W • 540lm • 30°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24494BR/27
STL24494PTO/27
STL24494BR/30
STL24494PTO/30

S.LINE ACCENT LIGHT



4W • 290lm • 24°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24414BR/27
STL24414PTO/27
STL24414BR/30
STL24414PTO/30

S.LINE ADJUSTABLE ACCENT LIGHT



4W • 290lm • 24°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24431BR/27
STL24431PTO/27
STL24431BR/30
STL24431PTO/30

S.LINE LED
SPOTLIGHT S16



8W • 570lm • 14°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24439BR/27
STL24439PTO/27
STL24439BR/30
STL24439PTO/30

S.LINE LED
SPOTLIGHT S20



12W • 770lm • 25°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24441BR/27
STL24441PTO/27
STL24441BR/30
STL24441PTO/30

S.LINE LED
SPOTLIGHT S16



8W • 570lm • 14°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24493BR/27
STL24493PTO/27
STL24493BR/30
STL24493PTO/30

S.LINE LED
SPOTLIGHT S20



12W • 770lm • 25°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24496BR/27
STL24496PTO/27
STL24496BR/30
STL24496PTO/30

S.LINE ACCENT LIGHT



8W • 580lm • 24°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24420BR/27
STL24420PTO/27
STL24420BR/30
STL24420PTO/30

S.LINE DIFFUSE NEOVISION



12W • 920lm • 80°
2700K • 3000K • CRI 95
DIM 0-10V
White • Black

STL24402BR/27
STL24402PTO/27
STL24402BR/30
STL24402PTO/30

S.LINE
24V DIMMABLE 0-10V SYSTEM



S.LINE DIFFUSE



12W • 630lm • 80°
2700K • 3000K • 4000K
CRI 95 • DIM 0-10V
White • Black

STL24409BR/27
STL24409PTO/27
STL24409BR/30
STL24409PTO/30
STL24409BR/40
STL24409PTO/40

S.LINE RECESSED TRACK
SHORT FRAME | 24V



24Vcc
1m • 2m
White • Black

STL24488BR
STL24488PTO
STL24489BR
STL24489PTO

6-WIRE FEEDER
FOR S.LINE 24V TRACKS



24Vcc
White • Black

STL24458BR
STL24458PTO

L CONNECTOR
FOR RECESSED S.LINE 24V TRACKS



White • Black

STL24467BR
STL24467PTO

I CONNECTOR
FOR S.LINE 24V TRACKS



White • Black

STL24473BR
STL24473PTO

S.LINE DIFFUSE



24W • 1290lm • 80°
2700K • 3000K • 4000K
CRI 95 • DIM 0-10V
White • Black

STL24410BR/27
STL24410PTO/27
STL24410BR/30
STL24410PTO/30
STL24410BR/40
STL24410PTO/40

S.LINE SURFACE TRACK
24V



24Vcc
1m • 2m
White • Black

STL24482BR
STL24482PTO
STL24483BR
STL24483PTO

S.LINE
DRIVER FOR S.LINE 24V TRACKS



100W
24Vcc • 100-240V
White • Black

STL24442BR
STL24442PTO

L CONNECTOR
FOR SURFACE S.LINE 24V TRACKS



White • Black

STL24471BR
STL24471PTO

SUSPENSION KIT



2x 2m
White • Black

STL25474BR
STL25474PTO

Learn more



TRACE
MICRO
ESSENTIAL IN SIZE, THOROUGH
IN ITS COMBINATIONS.



Compact dimensions are a standout feature of this system, that offers several application possibilities. Composed of surface tracks, spotlights and luminaires with distinguishing light effects, Trace Micro presents Stella's versatility in low-glare models, including options with inclining adjustment of the product's beam. A new product illuminated by Stella's quality and the sophistication of minimalism.



Full-scale
image of the
product.



DESIGN'S NEW COLOR.

A first for our portfolio, the new dark gray color highlights the models' circular shapes and impeccable finishing, while also reenforcing the series' contemporary nature, seamlessly blending in with different interior design styles.



TRACE MICRO
24V SYSTEM

TRACE MICRO LED SPOTLIGHT



5W • 200lm • 15°
2700K • 3000K • CRI 90
White • Black
Dark Gray

STL25336BR/27
STL25336PTO/27
STL25336GR/27
STL25336BR/30
STL25336PTO/30
STL25336GR/30

TRACE MICRO LED SPOTLIGHT



5W • 230lm • 36°
2700K • 3000K • CRI 97
White • Black
Dark Gray

STL25335BR/27
STL25335PTO/27
STL25335GR/27
STL25335BR/30
STL25335PTO/30
STL25335GR/30

TRACE MICRO LED SPOTLIGHT



7W • 510lm • 36°
2700K • 3000K • CRI 97
White • Black
Dark Gray

STL25334BR/27
STL25334PTO/27
STL25334GR/27
STL25334BR/30
STL25334PTO/30
STL25334GR/30

TRACE MICRO LED SPOTLIGHT



12W • 727lm • 36°
2700K • 3000K • CRI 97
White • Black
Dark Gray

STL25333BR/27
STL25333PTO/27
STL25333GR/27
STL25333BR/30
STL25333PTO/30
STL25333GR/30

TRACE MICRO DIFFUSE LIGHT



6W • 500lm • 40°
2700K • 3000K • CRI 92
White • Black

STL25332BR/27
STL25332PTO/27
STL25332BR/30
STL25332PTO/30

TRACE MICRO DIFFUSE LIGHT



12W • 1044lm • 40°
2700K • 3000K • CRI 92
White • Black

STL25331BR/27
STL25331PTO/27
STL25331BR/30
STL25331PTO/30

TRACE MICRO ACCENT LIGHT



6W • 308lm • 24°
2700K • 3000K • CRI 90
White • Black

STL25330BR/27
STL25330PTO/27
STL25330BR/30
STL25330PTO/30

TRACE MICRO ACCENT LIGHT



12W • 605lm • 24°
2700K • 3000K • CRI 90
White • Black

STL25355BR/27
STL25355PTO/27
STL25355BR/30
STL25355PTO/30

TRACE MICRO ADJUSTABLE
ACCENT LIGHT



6W • 308lm • 24°
2700K • 3000K • CRI 90
White • Black
Dark Gray

STL25361BR/27
STL25361PTO/27
STL25361GR/27
STL25361BR/30
STL25361PTO/30
STL25361GR/30


TRACE MICRO SURFACE
TRACK



24V
1m • 2m
White • Black
Dark Gray

STL25322BR
STL25322PTO
STL25322GR
STL25321BR
STL25321PTO

L CONNECTOR
FOR TRACE MICRO 24V TRACKS



24V
White • Black
Dark Gray

STL25310BR
STL25310PTO
STL25310GR

I CONNECTOR
FOR TRACE MICRO 24V TRACKS



24V
White • Black

STL25312BR
STL25312PTO

FEEDER
FOR TRACE MICRO 24V TRACKS



24V
White • Black

STL25313BR
STL25313PTO

Learn more





STAGE

TURN THE LIGHTS ON. SET THE SCENE.

Want to move beyond the ordinary in interior lighting? Reveal each space's personality with Stage's scenic light. Stella's new spotlight offers versions for the Trace system and canopy options. There are 3 models, with a deep recess that provides greater visual comfort and total freedom to combine different LED lamps.



MR11 / MR16
STL25445PTO



STL25454PTO



AR70 / PAR20
STL25446PTO



STL25456PTO



AR111 / PAR30
STL25449PTO



STL25458PTO



Available in two options, for Trace tracks and a version with canopy, which can also be installed on cable trays.

LIGHTS ON THE RIGHT SPOT.

More than a technical adjustment, aiming the light is a purposeful action. With THE RIGHT SPOT feature, a smooth and precise beam adjustment helps you fit the light effect to your needs.





24V OUTDOOR LIGHTING

SAFETY FROM THE GROUND UP.

Stella now has the complete solution for your garden, with a broad 24V portfolio that offers LED spikes, path-lights and LED ingrounds. The extra-low voltage models are ideal for external spaces and direct contact with soil, ensuring greater protection and an extra safe installation when compared to the 100-240V models.

ORGANIK

THE HARMONY BETWEEN LIGHT AND NATURE.

Inspired by a garden's natural beauty and exuberant green spaces, the Organik series enhances landscaping's intentions in a seamless and versatile way. There are different signature strapping spotlights and light stick models that blend into the vegetation like a “living” landscape element, revealing colors, textures, and details over time.





More than elegant design and comfortable lighting, Organik offers safety and quality to gardens, introducing extra-low voltage (24V) models, IP65 protection and reinforced insulation against water.



ORGANIK
24V

ADJUSTABLE ACCENT
LIGHT STICK

1W • 80lm • 40°
2400K • 2700K • 3000K
CRI 90 • IP65 • DIM
H: 250mm
STL25778/24
STL25778/27
STL25778/30



1W • 80lm • 40°
2400K • 2700K • 3000K
CRI 90 • IP65 • DIM
H: 500mm
STL25779/24
STL25779/27
STL25779/30



AMBIENT LIGHT STICK

0.7W • 20lm • 300°
2400K • 2700K • 3000K
CRI 90 • IP65 • DIM
H: 250mm
STL25748/24
STL25748/27
STL25748/30



0.7W • 20lm • 300°
2400K • 2700K • 3000K
CRI 90 • IP65 • DIM
H: 500mm
STL25749/24
STL25749/27
STL25749/30



0.7W • 35lm • 250°
2700K • 3000K
CRI 90 • IP65 • DIM
H: 1000mm
STL25771/27
STL25771/30



VERTICAL LIGHT STICK

2.8W • 70lm • 120°
2700K • 3000K
CRI 90 • IP65 • DIM
H: 500mm
STL25777/27
STL25777/30



STRAPPING SPOTLIGHT

1W • 80lm • 40°
2700K • 3000K
CRI 90 • DIM
H: 64mm
STL25780/27
STL25780/30



Dimming is possible when using a dimmable 24V Stella LED Driver.

Learn more





VERTIK

VERTICAL BY DESIGN. VERSATILE BY NATURE.

With a robust construction and extra-low voltage (24V) options, the Vertik series delivers safety and recessed light source's comfortable illumination for outdoor spaces. The adjustable and angular versions offer more lighting possibilities, with different applications and the option to create dual light effects by splitting light up/down or to opposite sides.



ANGULAR LIGHT BOLLARD



3W • 140lm • 40°
24V • DIM 0-10V • 2700K • IP65
100-240V • 3000K • IP65
H: 400mm
STL25785/27
STL25781/30



6W • 280lm • 40°
24V • DIM 0-10V • 2700K • IP65
100-240V • 3000K • IP65
H: 600mm
STL25786/27
STL25782/30

ADJUSTABLE LIGHT BOLLARD



4W • 260lm • 36°
24V • DIM 0-10V • 2700K • IP65
100-240V • 3000K • IP65
H: 400mm
STL25787/27
STL25783/30



8W • 260lm / 260lm • 36°
24V • DIM 0-10V • 2700K • IP65
100-240V • 3000K • IP65
H: 600mm
STL25788/27
STL25784/30



S.GROUND 24V PRO

THE GUARANTEE OF AN EFFICIENT
AND SAFE LIGHTING.



S.GROUND 24V is the natural evolution of a series that has redefined the standards for LED ingrounds and spikes in Outdoor Lighting.

The new PRO generation offers the same technical excellency and robust structure from the original 100-240V models, besides extra features, like extra-low voltage, 0-10V dimming and a high CRI (>90). All with a 3-year warranty and the certainty of keeping water away from your product.





H2OFF.
PROTECTION WAY BEYOND
THE SURFACE.

Get to know Stella's signature solution,
composed by an Anti-Condensation Device
and a High-Density Cable, that offers
double protection against moisture and
prevents water infiltration from advancing
through the cable to the electric circuit.



S.GROUND 24V PRO
DIMMABLE 0-10V



LED INGROUNDS



4W • 320lm • 36°
2700K • CRI 90 • IP67
DIM 0-10V
Ø55x90mm
STL25701/27



6.5W • 520lm • 36°
2700K • CRI 90 • IP67
DIM 0-10V
Ø66x100mm
STL25702/27



11.5W • 950lm • 36°
2700K • CRI 90 • IP67
DIM 0-10V
Ø87x110mm
STL25703/27



18.5W • 1500lm • 36°
2700K • CRI 90 • IP67
DIM 0-10V
Ø111x120mm
STL25704/27

LED INGROUNDS WITH ANTI-GLARE GRID



6.5W • 360lm • 14°
2700K • CRI 90 • IP67
DIM 0-10V
Ø66x100mm
STL25304/27



11.5W • 700lm • 14°
2700K • CRI 90 • IP67
DIM 0-10V
Ø87x110mm
STL25305/27



18.5W • 1120lm • 14°
2700K • CRI 90 • IP67
DIM 0-10V
Ø111x120mm
STL25306/27

LED SPIKES



4W • 320lm • 36°
2700K • CRI 90 • IP67
DIM 0-10V
Ø40x90mm
STL25757/27



6.5W • 520lm • 36°
2700K • CRI 90 • IP67
DIM 0-10V
Ø50x100mm
STL25758/27



11.5W • 950lm • 36°
2700K • CRI 90 • IP67
DIM 0-10V
Ø68x110mm
STL25759/27



18.5W • 1500lm • 36°
2700K • CRI 90 • IP67
DIM 0-10V
Ø90x120mm
STL25760/27

LED SPIKES WITH ANTI-GLARE GRID



6.5W • 360lm • 14°
2700K • CRI 90 • IP67
DIM 0-10V
Ø50x100mm
STL25307/27



11.5W • 700lm • 14°
2700K • CRI 90 • IP67
DIM 0-10V
Ø68x110mm
STL25308/27





18.5W • 1120lm • 14°
2700K • CRI 90 • IP67
DIM 0-10V
Ø90x120mm
STL25309/27

Learn more



WAY 24V

MORE SAFETY IN YOUR PATHWAY.

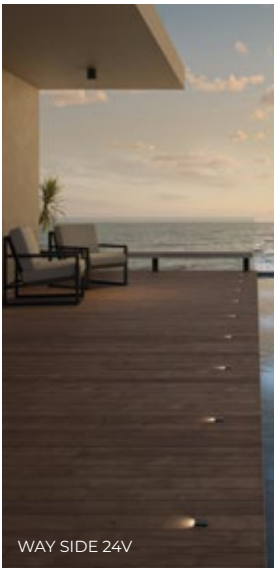

Explore visual comfort with the Way series path-lights and its multiple light effects in extra-low voltage versions. With 24V, these products use a safe voltage band and are ideal for outdoor applications, especially gardens, areas in close proximity to pools or that are exposed to water affects.



STL22711PTO/30
STL22711AL/30



STL22712PTO/30
STL22712AL/30



STL22715/30



STL22713/30
STL22714/30

[Learn more](#)



EVO FLOODLIGHT


AN INTENSE LIGHT FOR A STRIKING EFFECT.

Available in four power options, the EVO Floodlight is ideal for landscaping applications that demand a precise and reliable lighting with the Block System, an extra safety feature patented by Stella.



BLOCK SYSTEM.

Besides a robust structure and IP66 protection, the product also presents the Block System, a Stella signature solution composed by an Anti-Condensation Device and a High-Density Cable.

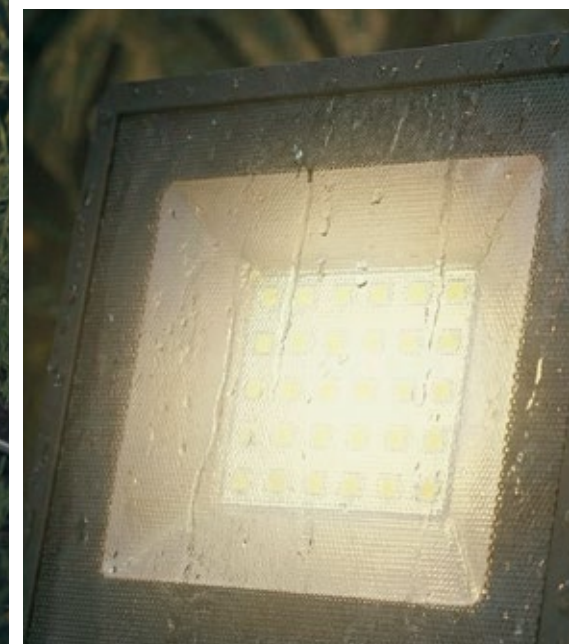

10W • 800lm • 120°
3000K • 4000K
IP66
100-240V
STL25720/30
STL25720/40



20W • 1600lm • 120°
3000K • 4000K
IP66
100-240V
STL25730/30
STL25730/40



30W • 2400lm • 120°
3000K • 4000K
IP66
100-240V
STL25740/30
STL25740/40



50W • 4000lm • 120°
3000K • 4000K
IP66
100-240V
STL25750/30
STL25750/40

[Learn more](#)



NEON LED STRIPS

LINEAR LIGHTING'S NEW MAGNITUDE.



Welcome to the freedom of Neon 24V LED Strips' linear lighting. The versatility of Stella's new solution, that goes beyond conventional applications, starts with Neon Archi's square capsule and vertical curve, projecting light to one side. IP66 protection makes them ideal for façades and external area applications.



NEON FULL SIDE




With a round body, vertical bending and a homogenous light effect that radiates on all sides, the Neon Full Side LED Strip offers total flexibility for decorative applications, with a highly accurate color reproduction and IP66 Protection.





NEON+

To fully explore the features of the Neon Full Side LED strips, Stella offers the Neon+ accessories, like the linear guide, a surface mounted canopy and different kinds of holders to make it easier to fixate the LED strips on the ceiling or walls.

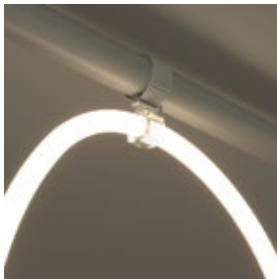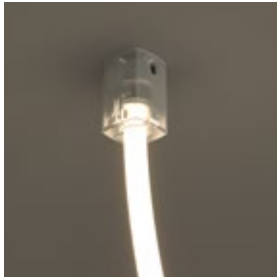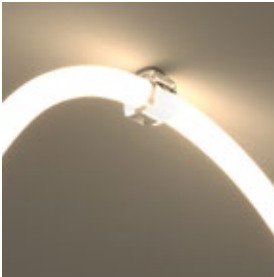

NEON LED STRIPS
LIGHTING FIXTURES AND PROFILES

NEON FULL SIDE 24V
LED STRIP
360° | Ø12mm



10W/m • 750lm/m
2400K • 2700K • 3000K
CRI 93 • IP66
STL25847/24
STL25847/27
STL25847/30

NEON ARCHI 24V
LED STRIP
ONE SIDE



14W/m • 550lm/m
2700K • 3000K
CRI 93 • IP66
STL25819/27
STL25819/30

NEON+
FIXED HOLDER Ø12mm



STL25569

NEON+
SUSPENDED HOLDER Ø12mm



Suspension kit included
STL25558

NEON+
BELT HOLDER Ø12mm



Fixating belt included
STL25560

NEON+
SURFACE MOUNTED CANOPY Ø12mm



STL25559

NEON+
LINEAR GUIDE Ø12mm



STL25561

Learn more



ALL LIGHT

LED STRIPS

ONE SERIES, SEVERAL APPLICATIONS.



THERMO 24V ULTRA LED STRIP

With CRI 96 and superior resistance to withstand extreme conditions, Thermo LED Strips bring Stella's superior quality in external applications or indoor spaces exposed to heat and moisture, like saunas, changing rooms and bathrooms.



IP68 AND HIGH RESISTANCE.
Superior resistance protects the product against prolonged water submersion* and exposure to temperatures up to 105°C.



*Product cannot be installed in swimming pools and cannot be exposed to chlorine.





SUPERMICRO AND MICRO
ALL LIGHT 12V EVO LED STRIPS

Explore the new series' additions' compact dimensions, in 2.8 and 5 millimeters of width, to be applied on furniture.



EXTRA-WARM
ALL LIGHT LED STRIPS

Add an extra layer of comfort with the coziness of 2100K and 2400K, Stella's new extra-warm color temperatures, available for IP20 and IP67 models.



ALL LIGHT 24V PRO LED STRIPS
FREE-CUT IP65 AND CRI 97

Enjoy a spot-on measure of light with the Free-cut LED Strips, that allow free cutting of the strip, without loses of luminous flux or reducing the accuracy of color reproduction.

20N/cm²

High adhesion



ALL LIGHT 24V LED STRIPS

THERMO 24V ULTRA LED STRIP IP68	ALL LIGHT 24V PRO LED STRIP FREE-CUT	ALL LIGHT 24V PRO LED STRIP EXTRA-WARM	ALL LIGHT 24V PRO LED STRIP EXTRA-WARM · IP67
10W/m · 750lm/m 2400K · 2700K · 3000K CRI 96 · IP68 STL25803/24 STL25803/27 STL25803/30	15W/m · 800lm/m 2700K · 3000K CRI 97 · IP65 STL25949/27 STL25949/30	16W/m · 1050lm/m 2400K CRI 95 STL25845/24	16W/m · 950lm/m 2400K CRI 95 · IP67 STL25878/24

ALL LIGHT 24V PRO LED STRIP	ALL LIGHT 24V PRO LED STRIP
12W/m · 900lm/m 2700K · 3000K CRI 95 STL25947/27 STL25947/30	21W/m · 1600lm/m 2700K · 3000K CRI 95 STL25948/27 STL25948/30

ALL LIGHT 12V LED STRIPS

ALL LIGHT 12V EVO LED STRIP SUPERMICRO 2.8mm	ALL LIGHT 12V EVO LED STRIP MICRO 5mm	ALL LIGHT 12V EVO LED STRIP EXTRA-WARM	ALL LIGHT 12V EVO LED STRIP IP65
5W/m · 300lm/m 2700K · 3000K CRI 90 STL25801/27 STL25801/30	6W/m · 450lm/m 3000K CRI 90 STL25939/30	7W/m · 450lm/m 2100K · 2400K CRI 90 STL25804/21 STL25804/24	10W/m · 700lm/m 3000K CRI 90 · IP65 STL25815/30

ALL LIGHT 12V EVO LED STRIP IP67	ALL LIGHT 12V EVO LED STRIP IP67	ALL LIGHT 12V EVO LED STRIP	ALL LIGHT 12V EVO LED STRIP IP65
7W/m · 450lm/m 3000K CRI 90 · IP67 STL25816/30	10W/m · 650lm/m 3000K CRI 90 · IP67 STL25829/30	20W/m · 1300lm/m 2700K · 3000K CRI 90 STL25919/27 STL25919/30	20W/m · 1200lm/m 2700K · 3000K CRI 90 · IP65 STL25934/27 STL25934/30

Learn more





PRO IP67

LED DRIVERS

EXTRA PROTECTION FOR EXTERNAL APPLICATIONS.



Available in 12V and 24V versions, PRO IP67 LED Drivers offer a high power factor and 0-10V dimming, for a precise lighting intensity control. The high Ingress Protection is a standout feature of this product, ensuring extra safety for it to be applied on external spaces or areas exposed to water affects or moisture.

12V MODELS:

75W · STL25807
75W DIM · STL25806

24V MODELS:

30W DIM · STL25863
75W · STL25880
75W DIM · STL25864
150W · STL25890
320W · STL25605



[Learn more](#)



PRO CCT CONTROL

24V LED DRIVERS

LIGHT INTENSITY AND COLOR TEMPERATURE AS YOU WISH.



With a high power factor and two independent 0-10V output channels, the PRO CCT Control 24V LED Driver allows for color temperature adjustment and precise dimming, creating customized ambiances for each space.

24V MODELS:

75W DIM · STL25601
150W DIM · STL25602



[Learn more](#)


S.TOUCH

CONTROL AND PRECISION AT ITS MOST COMPLETE VERSION.



STELLA'S TOUCH.

S.TOUCH is now a complete line, with switches, outlets and a series of accessories. The greatest addition to the S.TOUCH dimmers is the arrival of the 0-10V version, which allows for 1% to 100% lighting intensity control, using the Touch Slider gang and a precise intensity adjustment, with the new SLOW DIMMING feature.

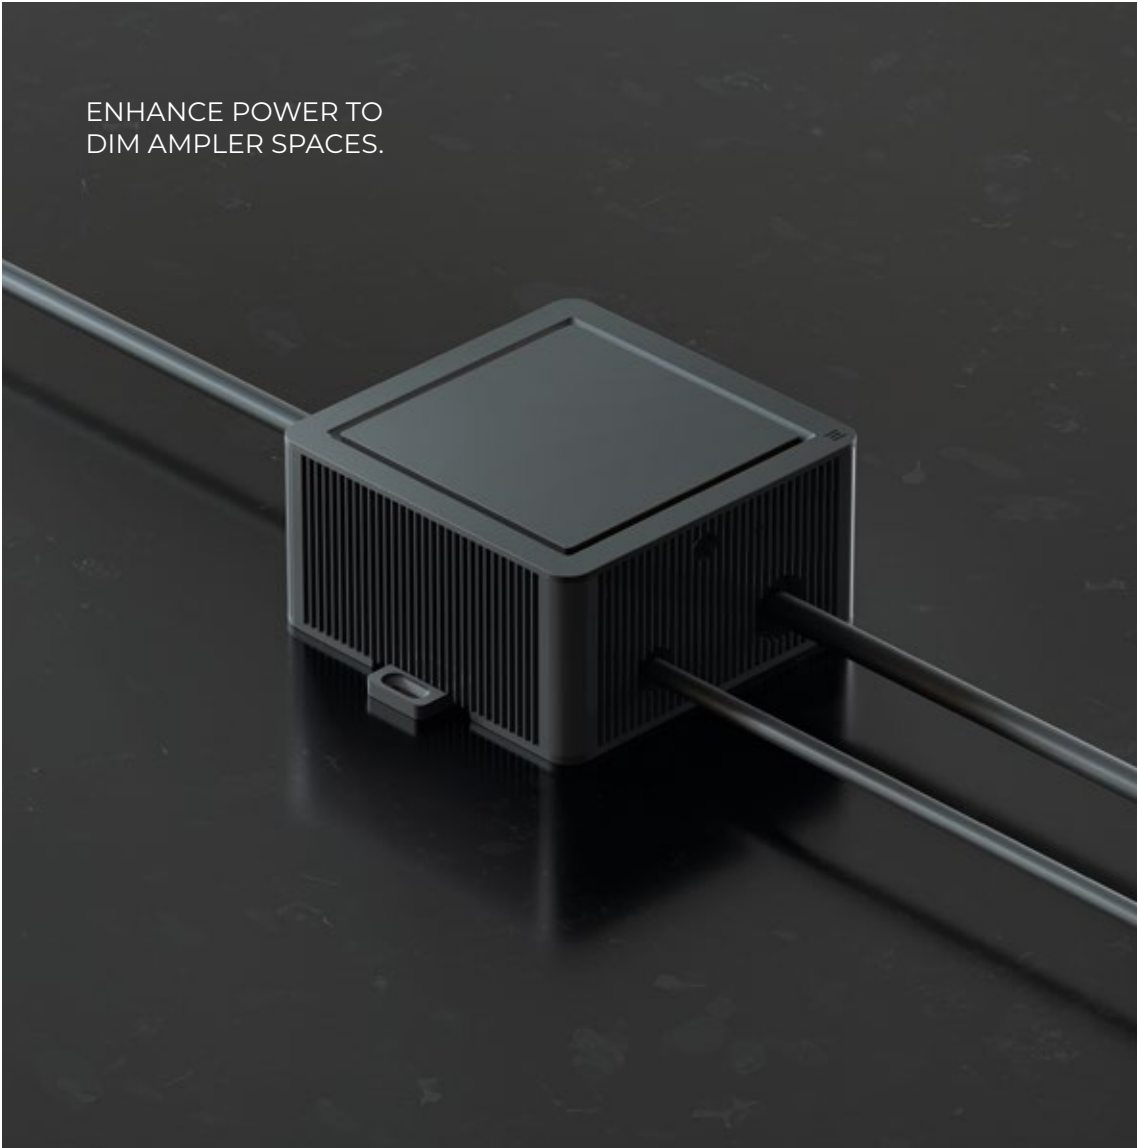

Compatible with 100% of Stella's dimmable DualCut LED drivers, the S.TOUCH Amplifier is an accessory that offers an impressive maximum load capacity to dim LED drivers.

MAXIMUM LOAD CAPACITY

900VA (127V)
1,800VA (220V)



TRIPLE DIMMER AND SWITCH:
LIGHT AND CONTROL
SIDE BY SIDE.



S.TOUCH

DIMMERS, SWITCHES, OUTLETS

DIMMER

DUALCUT



Max. Output Power: 200VA
White - STO24001BR
Black - STO24001PTO

DOUBLE DIMMER

DUALCUT



Max. Output Power: 260VA
(2x130VA)
White - STO24002BR
Black - STO24002PTO

TRIPLE DIMMER

DUALCUT



Max. Output Power: 300VA
(3x100VA)
White - STO24003BR
Black - STO24003PTO

DIMMER + SWITCH

DUALCUT



Max. Output Power Dimmer: 130VA
Max. Output Current Switch: 10A
White - STO25021BR
Black - STO25021PTO

DIMMER + TRIPLE SWITCH

4x4



Max. Output Power: 300VA
(3x 100VA) Max. Output Current
Switch: 30A (3x 10A)
White - STO25023BR
Black - STO25023PTO

DIMMER

0-10V



Devices Supported: 40
White - STO24004BR
Black - STO24004PTO

DOUBLE DIMMER

0-10V



Devices Supported: 80 (2x 40)
White - STO24005BR
Black - STO24005PTO

TRIPLE DIMMER

0-10V



Devices Supported: 120 (3x 40)
White - STO25006BR
Black - STO25006PTO

SWITCH



Max. Output Current: 10A
White - STO25011BR
Black - STO25011PTO

DOUBLE SWITCH



Max. Output Current: 14A (2x 7A)
White - STO25012BR
Black - STO25012PTO

TRIPLE SWITCH



Max. Output Current: 15A (3x 5A)
White - STO25013BR
Black - STO25013PTO

SWITCH

+ 10A OUTLET



Max. Output Current Switch: 10A
Max. Output Current Outlet: 10A
White - STO25022BR
Black - STO25022PTO

10A DOUBLE OUTLET



Max. Output Current: 10A
White - STO24410BR
Black - STO24410PTO

20A DOUBLE OUTLET



Max. Output Current: 20A
White - STO24420BR
Black - STO24420PTO

10A OUTLET +

DOUBLE USB-C OUTLET



Max. Output Current Outlet: 10A
Max. Output Current USB-C: 2.1A
White - STO24430BR
Black - STO24430PTO

AMPLIFIER



Max. Output Power:
900VA (127V) • 1800VA (220V)
Black - STO24071

FIND US

LATIN AMERICA

Headquarters

Rua Borges de Medeiros, 977 - Santa Fé
Sapiranga - RS

Distribution Center

Rodovia Jorge Lacerda, 1010, Galpão 16-17 - Itajaí - SC

EUROPE

Spain Distribution Center

Polígono Industrial El Pastoret, Carrer Illes Balears, 3
03640 - Monòvar - Alicante

CONTACT US

Phone

+55 51 3529-7044

Sales

global@stella.com.br

Marketing

marketing@stella.com.br

SAC

support@stella.com.br

ASIA

Lab and Development Center

Dongguan city, Liaobu town, Xiangyuan East
Road No. 60 building 5, entrance A, 3 Floor,
Room 301

Hong Kong Office

Ste 01-02A, 9/F, Twr 5, 33 Canton Rd, Tsim Sha
Tsui, Kowloon

WEBSITE AND SOCIAL MEDIA

Follow us online and get inspired
with Stella.

www.stella.com.br

Instagram | @stella.iluminacao

TikTok | @stella.iluminacao

Facebook | /stella.iluminacao

YouTube | /stellailuminacao

Pinterest | /stellailuminacao

LinkedIn | /stellailuminacao



Stella reserves the right to change, at any moment and without prior notice, any characteristics of its products, including technical specifications, colors, models, shapes, materials etc.

Copyright © 2026 Stella Iluminação, all rights reserved.



Learn more

